

**DLC70F Series**
**◆ Product Features**

High Q, High RF Current/Voltage, High RF Power, Low ESR/ESL, Low Noise,  
 Ultra- Stable Performance.

**◆ DLC70F Series Rated Capacitance Table**

Cap.pF	Code	Tol.	Rated WVDC	Cap.pF	Code	Tol.	Rated WVDC	Cap.pF	Code	Tol.	Rated WVDC
1.0	1R0	B,C,D	2000V Code 202 or 3000V Code 302 or 5000V Code 502	22	220	G,J, K,M	2000V Code 202 or 3000V Code 302 or 5000V Code 502	390	391	G,J, K,M	2000V Code 202 or 3000V Code 302
1.2	1R2			27	270			470	471		
1.5	1R5			33	330			560	561		
1.8	1R8			39	390			680	681		
2.2	2R2			47	470			820	821		
2.7	2R7			56	560			1000	102		
3.3	3R3			68	680			1200	122		2000V Code 202
3.9	3R9			82	820			1500	152		
4.7	4R7			100	101			1800	182		
5.6	5R6			120	121			2200	222		
6.8	6R8			150	151			2700	272		
8.2	8R2			180	181			3300	332		
10	100	G,J, K,M		220	221	2000V Code 202 or 3000V Code 302	4700	472		1000V Code 102	
12	120			270	271		5100	512			
15	150			300	301		5600	562			
18	180						6800	682			

Remark: special capacitance, tolerances and WVDC are available, consult with DALICAP.

### ◆ Performance





Item	Specifications
Quality Factor (Q)	1 pF to 1000 pF: greater than 2000 at 1 MHz. More than 1000 pF: greater than 2000 at 1 KHz.
Insulation Resistance (IR)	Test Voltage: 500V 10 <sup>5</sup> Megohms min. @ +25°C at rated WVDC. 10 <sup>4</sup> Megohms min. @ +125°C at rated WVDC.
Rated Voltage	See Rated Voltage Table
Dielectric Withstanding Voltage(DWV)	250% of rated WVDC for 5 seconds.
Operating Temperature Range	-55°C to +125°C
Temperature Coefficient (TC)	0 ± 30ppm/°C
Capacitance Drift	± 0.02% or ± 0.02pF, whichever is greater.
Piezoelectric Effects	None





### ◆ Environmental Tests

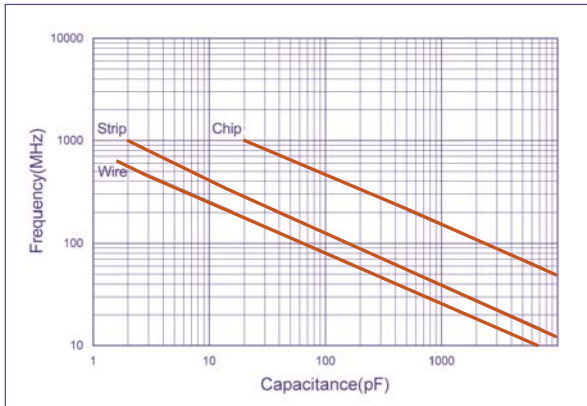
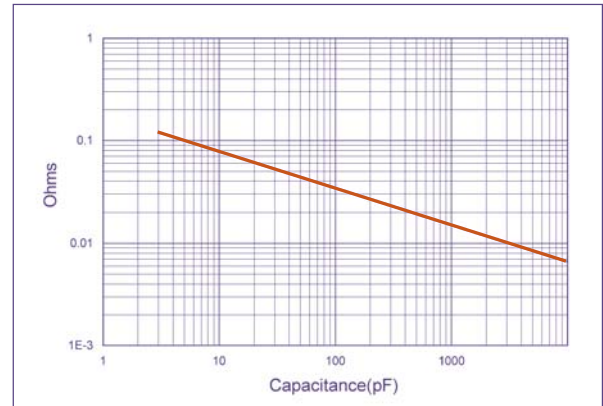
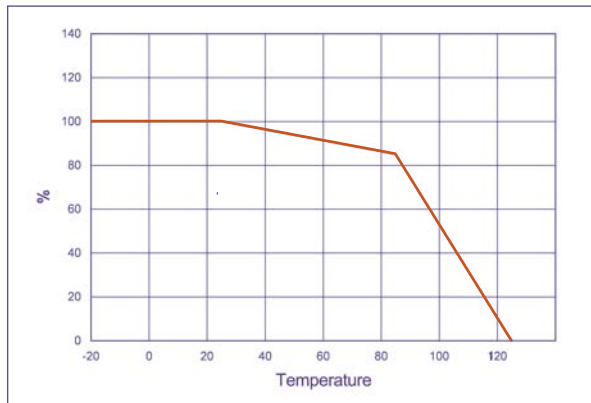
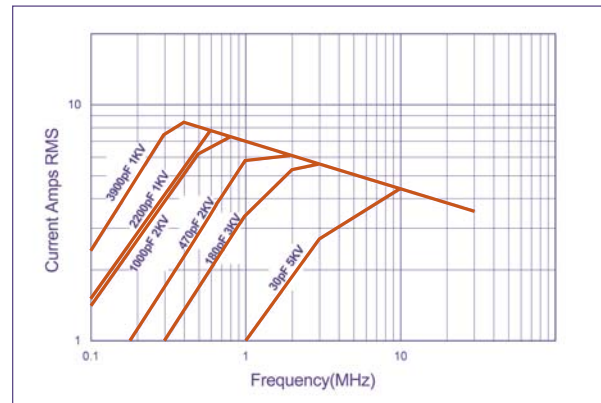
Item	Specifications	Method
Thermal shock	DWV: the initial value IR: Shall be not less than 30% the initial value Capacitance change:	MIL-STD-202, Method 107, Condition A. At the maximum rated temperature(-55°C and 125°C) stay 30 minutes,The time of removing shall be not more than 3 minutes. Perform the five cycle
Moisture resistance	no more than 0.5% or 0.5pF.	MIL-STD-202, Method 106.
Humidity (steady state)	DWV: the initial value IR: the initial value Capacitance change: no more than 0.3% or 0.3pF.	MIL-STD-202, Method 103, Condition A, with 1.5 Volts D.C. applied while subjected to an environment of 85°Cwith 85% relative humidity for 240 hours min.
Life	IR: Shall be not less than 30% the initial value Capacitance change: no more than 0.2%	MIL-STD-202, Method 108, for 2000 hours, at 125°C. 150% Rated voltage D.C. applied.
Terminal Strength	Microstrip: more than 20 N; lead wire: more than 10 N.	MIL-STD-202, Method 211

**◆DLC70F Lead Type and Dimensions**

unit: inch(millimeter)

Series	Term. Code	Type/Outlines	Capacitor Dimensions			Lead Dimensions			Lead Material
			Length (L <sub>c</sub> )	Width (W <sub>c</sub> )	Thickness (T <sub>c</sub> )	Length (L <sub>L</sub> )	Width (W <sub>L</sub> )	Thickness (T <sub>L</sub> )	
70F	MS	 Microstrip	.614 +.015~ -.010 (15.60)	.433 ±.01 (11.0)	.154 ±.008 (3.90)	.787 (20.00)	.35 ±.01 (8.89)	.01 ±.005 (0.25)	Silver-plated Copper
70F	AR	 Axial Ribbon							
70F	RW	 Radial Wire							
70F	AW	 Axial Wire							
			+0.38~ -0.25)	±0.25)	±0.20)	.787 (20.00) min	Dia.=.03 ± .004 (0.8±0.1)		
						1.181 (30.00) min			

Series	Term. Code	Type/Outlines	Capacitor Dimensions			Lead Dimensions			Lead Material
			Length (L <sub>c</sub> )	Width (W <sub>c</sub> )	Thickness (T <sub>c</sub> )	Length (L <sub>L</sub> )	Width (W <sub>L</sub> )	Thickness (T <sub>L</sub> )	
70F	MN (non-mag)	 Microstrip	.614 +.015~ -.010 (15.60)	.433 ±.01 (11.0)	.154 ±.008 (3.90)	.787 (20.00)	.35 ±.01 (8.89)	.01 ±.005 (0.25)	Silver-plated Copper
70F	AN (non-mag)	 Axial Ribbon							
70F	RN (non-mag)	 Radial Wire							
70F	BN (non-mag)	 Axial Wire							
			+0.38~ -0.25)	±0.25)	±0.20)	.787 (20.00) min	Dia.=.03 ± .004 (0.8±0.1)		
						1.181 (30.00) min			

**◆ DLC70F Performance Curve**
**Self Resonant Frequency vs Capacitance**

**ESR vs Capacitance measured @ 30MHz**

**%Maximum Current vs Ambient Temperature**

**DLC70F Wire Terminals Rated Current vs Frequency**

**DLC70F Strip Terminals Rated Current vs Frequency**
